



E N G I N E E R E D A I R P R O D U C T S

CIRCULAR DIFFUSERS LMR SERIES





CIRCULAR DIFFUSERS



Application

Colman's LMR range of aluminium circular diffusers have been designed to provide an attractive and flexible solution to a wide variety of air distribution requirements.


Description and Finish

The units are available from 150mm neck up to 400mm neck and are manufactured from spun aluminium. White RAL9010 is the standard finish option but other finishes are available on request.



ADJUSTMENT/DIMENSIONS

Diffuser Dimensions



A Nominal Size (Spigot Diameter) (mm)	B Diameter of Installation Opening (mm)	C Overall Diameter (mm)	D Cone Diameter (mm)	E Diffuser Height (mm)
150	148	300	230	65
200	198	350	280	65
250	248	400	335	65
300	299	450	380	65
350	348	500	425	65
400	398	560	495	65

PERFORMANCE DATA

Nominal Size	Volume (l/s)	Neck Velocity	Pressure Drop (Pa)	Throw to 0.5 m/s Velocity (m)	Noise Rating (NR)
	20	1.13	2	0.4	<10
	30	1.70	4	0.7	<10
150	40	2.25	10	1.1	12
	50	2.80	16	1.4	25
	60	3.40	18	1.9	37
	40	1.27	3	0.8	<10
	50	1.60	5	1.0	12
200	60	1.90	8	1.4	21
	70	2.20	12	1.7	30
	80	2.55	15	2.0	36
	50	1.02	2	0.8	<10
	60	1.22	4	1.0	15
250	75	1.53	6	1.3	24
	85	1.73	8	1.5	28
	100	2.04	12	1.8	33
	80	1.13	2	0.8	<10
	95	1.34	4	1.1	12
300	110	1.55	7	1.3	24
	130	1.84	9	1.6	29
	150	2.12	12	2.0	34
	100	1.1	<5	0.8	<10
250	125	1.3	5	1.1	15
350	150	1.6	8	1.7	22
	175	2.0	12	2.2	30
	125	1.0	2	1.2	<10
400	150	1.2	3	1.5	10
	175	1.4	5	1.8	14
	200	1.6	7	2.0	25
	225	1.8	9	2.2	29
	250	2.0	11	2.6	34

Performance figures are for diffuser only and assume supply air temperature -10 to +10 degrees C relative to room temperature. Pressure drop shown is static pressure drop for diffuser only and does not allow for effect of plenum.

Throw value is measured horizontally to terminal velocity of 0.25 m/s and assumes ceiling effect.


Multiply throw value by 0.7 for installation without ceiling effect.

All NR ratings based on room absorption of 8 dB, dampers fully open.

OPTIONS & ORDER CODES

Options and Order Codes

Diffuser Codes

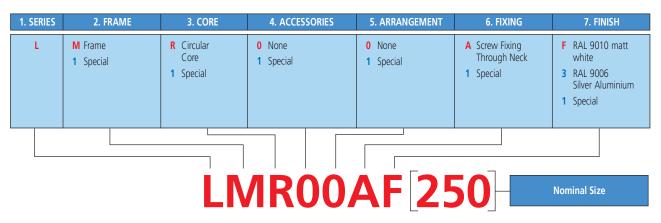

LMR00AF 250

Nominal size 250mm diameter (connection spigot diameter). Standard diffuser finish: Powder coated white RAL 9010 matt.

Plenum Codes

1. SERIES	2. LINING	3. TYPE	4. ACCESSORIES	5. ARRANGEMENT	6. SPIGOT TYPE	7. SPIGOT DIAMETER
L	L Lined N Unlined	S Square C Circular	0 None M Monoblade cord operated damper	 S Supply (comes with equalising grids) E Extract 	 R Round — Side entry S Square — Side entry T Round — Top entry U Square — Top entry 1 Special 	A 100 J 450 B 125 L 160 C 150 T 175 D 200 M 180 E 250 R 225 F 300 P 280 G 350 N 315 H 400 1 Special

Please contact the Sales Office for Plenum dimensions.

PRODUCT RANGES

GRILLES
Linear Bar
Ceiling
Sidewall
Floor
Computer Floor
Cill
Single & Double Deflection
Egg Crate
Hinged Core
Door Transfer
Security and Prison
Supply and Extract Valves

DIFFUSERS
Linear Slot
Louvre Face
Sidewall
Perforated Face
Circular
Swirl
Ceiling
Sidewall Fixed & Adjustable
Jet Flow / Nozzle
Repus Displacement Ventilation

LOUVRES
External
Circular
Door
Screens
Penthouse
Sand Louvres
Roof Louvres

BESPOKE SERVICE

We offer a bespoke design service where standard products do not fit the requirements of the build, we also supply products in special colours and finishes including bronze, brass, gold and chrome to meet Architectural design specifications.





Rydal Road Carnforth LA5 8LH

www.mesavent.co.uk sales@mesavent.co.uk 01542 900 123